


REVISION HISTORY			
REV.	DESCRIPTION	DATE	DRAWN BY
1	ORIGINAL PRINT	7/9/15	N. LAWRENCE
2	CHANGED ENCODER PPR TO 280	6/8/2016	N. LAWRENCE
3	UPDATED TO AMDS-1	7/20/2018	A. MILLS

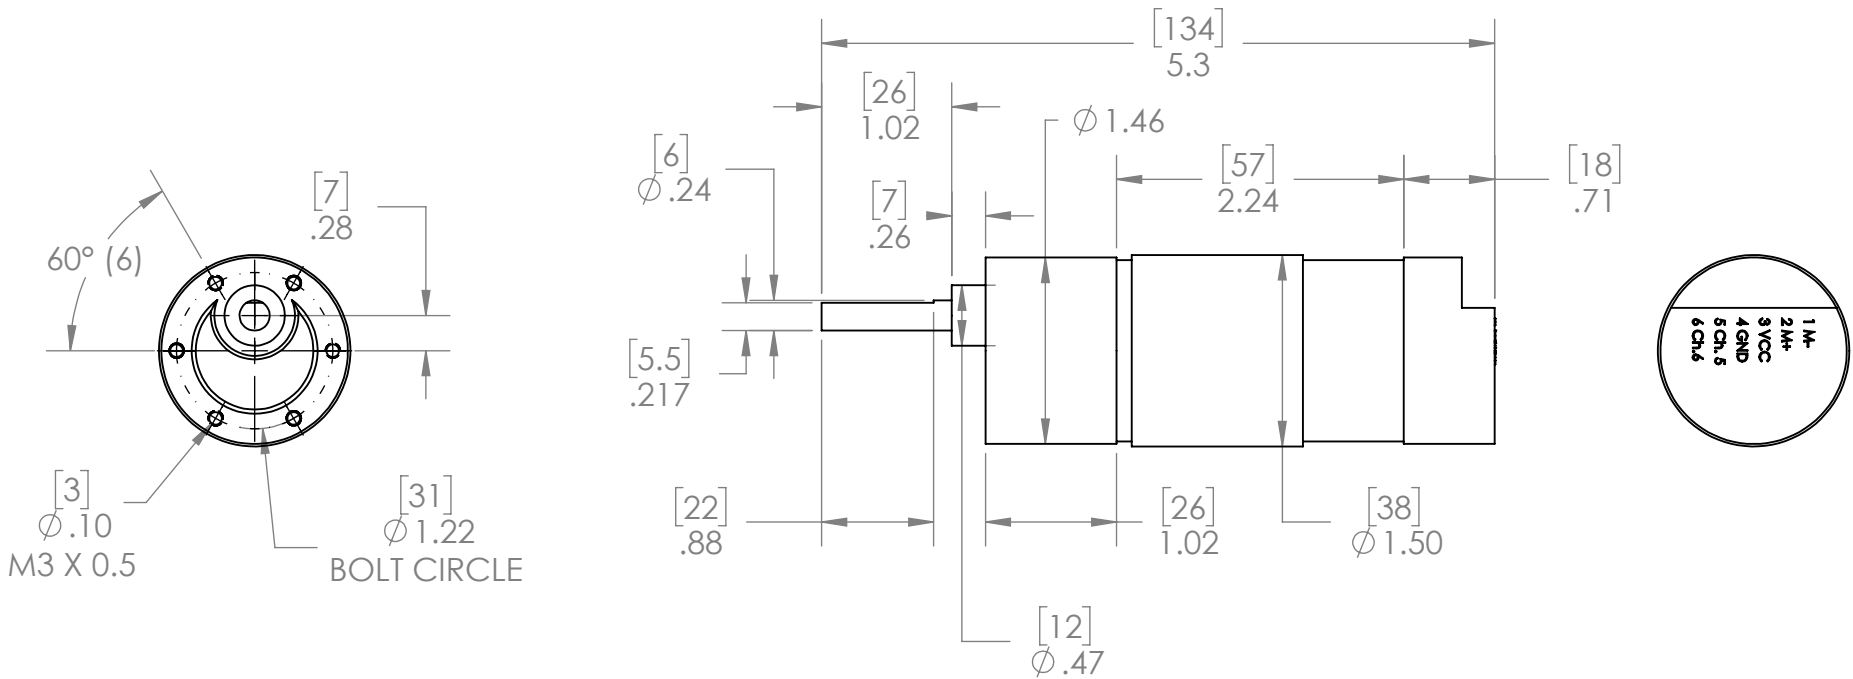

FREE SPEED	160 rpm
STALL TORQUE	350 oz-in
STALL CURRENT	11.5a
POWER	14 W
GEARBOX	40:1
GEAR MATERIAL	ALL STEEL
ENCODER	280 PULSES PER REVOLUTION OF THE OUTPUT SHAFT

*** SEE CAD FOR ADDITIONAL TOOLPATH INFO***

UNLESS OTHERWISE SPECIFIED:		COMMENTS:		ANDYMARK	
DIMENSIONS ARE IN INCHES		DUAL DIMENSIONS ARE IN MILLIMETERS.		TITLE:	
TOLERANCES:		BREAK ALL SHARP EDGES		NEVEREST CLASSIC 40	
FRACTIONAL	±1/16			SIZE	DWG. NO.
ANGULAR: MACH	±1°			A	am-2964a
ANGULAR: BEND	±5°			SCALE: 1:1.5	WEIGHT:
ONE PLACE DECIMAL	±0.1			SHEET 1 OF 1	
TWO PLACE DECIMAL	±0.01				
THREE PLACE DECIMAL	±0.005				
FOUR PLACE DECIMAL	±0.0005				
MATERIAL		NAME	DATE	REV	
FINISH		CHECKED	NL	8/14/18	3
		ENG APPR.			
		MFG APPR.			
		Q.A.			